



TPSh-M6M144SH1W




Recommended



Residential Roof



Utility Scale Ground Mounted

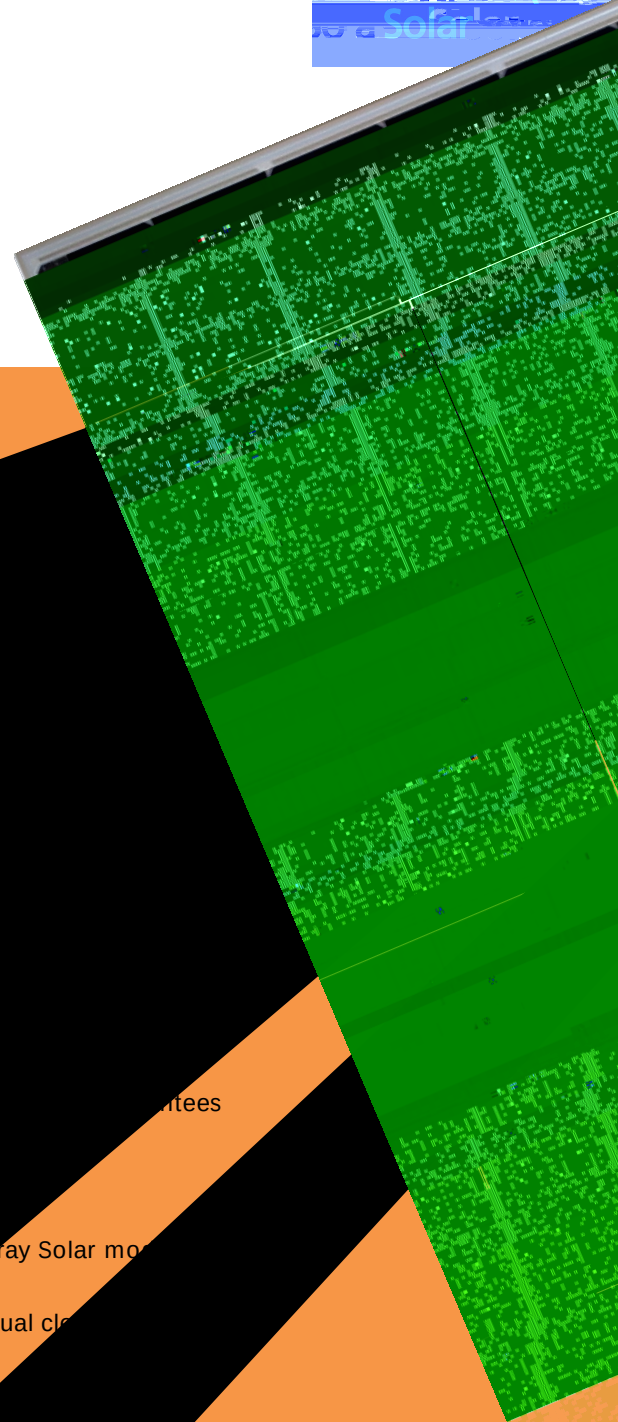

Half Cell:

Half cell design allows the panel to be operated in half of the original power.

Lower the internal resistance of the CTM, the CTM is more efficient.

Topographic map

and



Warranty

Pay Solar more


Manual close

2400Pa) and

caused by High

test.

Certification



TPSh- M6M144SH1W

Mechanical Specification

Module Series
Maximum Power at STC(Pmax)(W)
Short Circuit Current Isc(A)

Nominal Operating Cell Temperature(NOCT)

Temperature Coefficient of Pmax(γ)

Temperature Coefficient of Voc(β)

Temperature Coefficient of Isc(α)